



Quick Start Guide

Installer APP Setup

Step 1 (Before getting to site)

APP Download and Registration

(Skip this step if you already have an installer account.)

1. Download Esysunhome+




iOS




Android

2. Registration

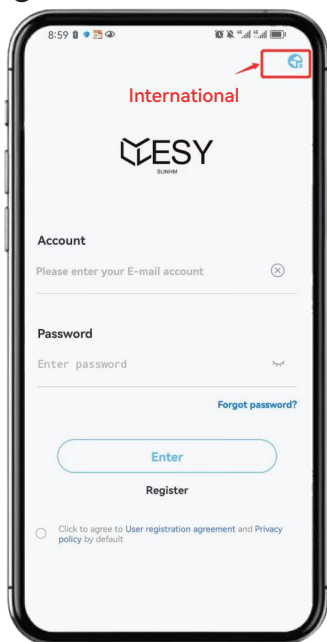



3. Authorization code

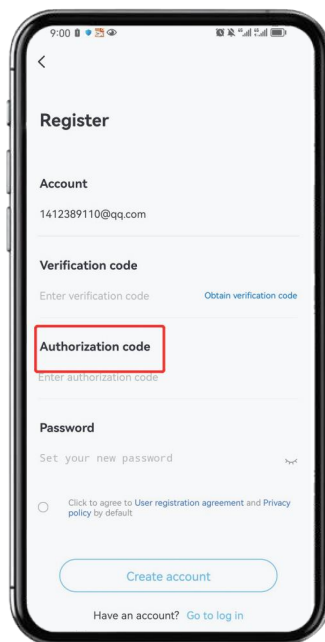

Please contact local support for assistance with this code.

Before commissioning...

- ▶ Wiring is done
- ▶ Meter communication works fine
(#5 blue&white to #11, #4 blue to #12 Or #5 to A, #4 to B)

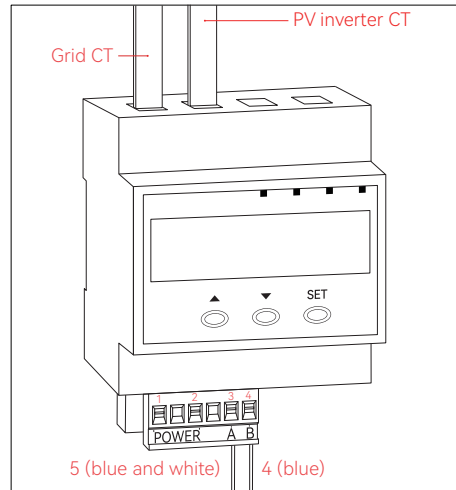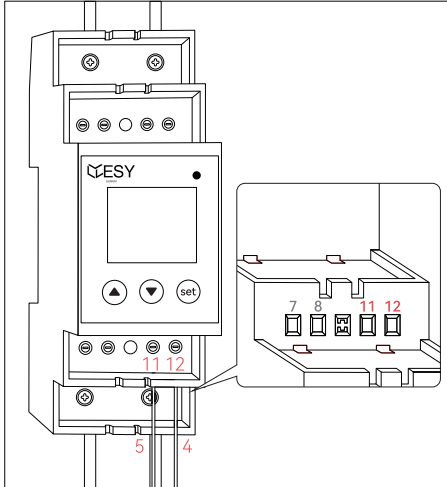

- ▶ Flip the circuit breaker of Grid side
- ▶ Flip the battery breaker on the inverter
- ▶ Let's proceed with commissioning...

Step 2 (Commissioning)



Add Device and Match Network

(Before proceeding, connect your phone to the owner's Wi-Fi and turn on Bluetooth.)

1. Add Device

Only when the end-user hasn't linked this device yet, otherwise choose Associate with new device.

If the device cannot be added, please contact local support.

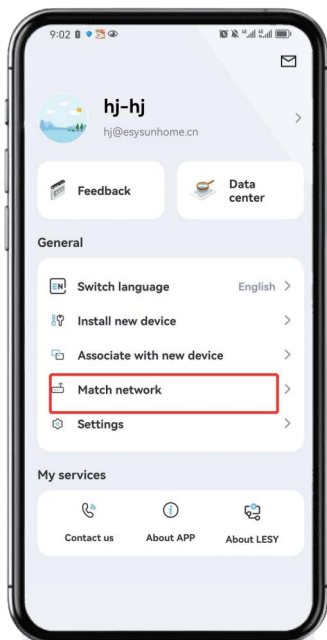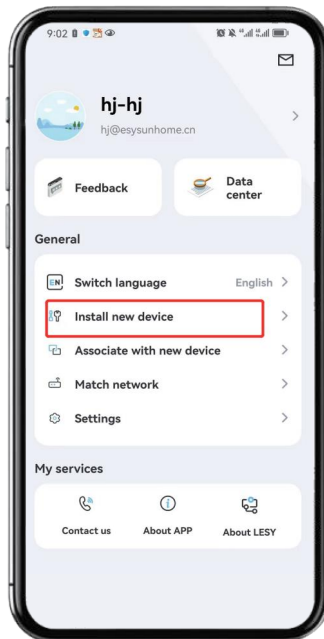


2. Match Network

2.4G Wi-Fi is required for network matching. If no Wi-Fi is available, refer to the steps on the next page.


*Step 2 (Commissioning)

Match network without Wi-Fi


(*Connect the device to the network via Hotspot if no Wi-Fi signal is available.)

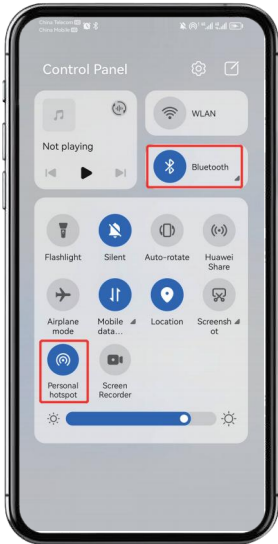


1. Switch Bluetooth and Hotspot on

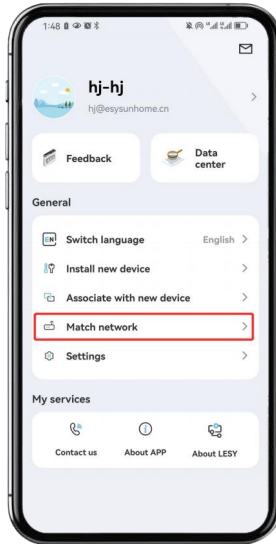


2. Match network

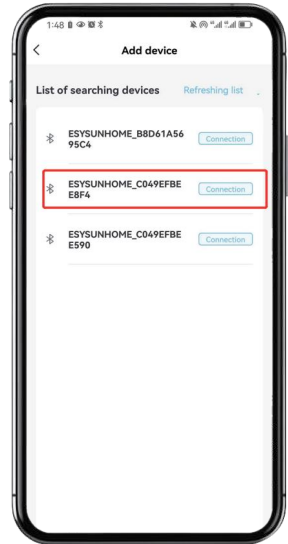

3. Connect device

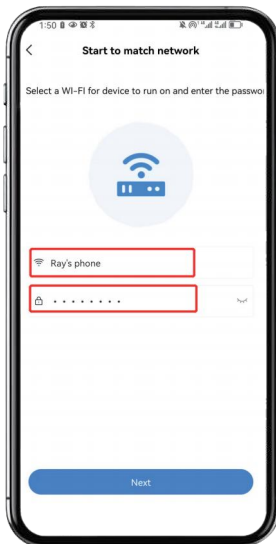

4. Put in phone ID and Hotspot password

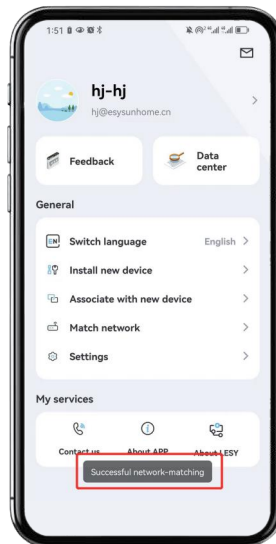


5. Success


*Step 2 (Commissioning)

Add Device and Match Network


(*If one phone can't connect the device online, you'll need two phones: one providing a network via Hotspot and the other matching the network, as follows.)

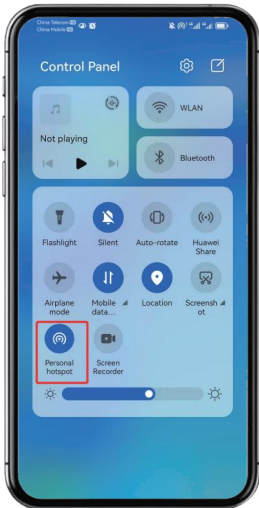


1. Share Hotspot
(Phone-A)

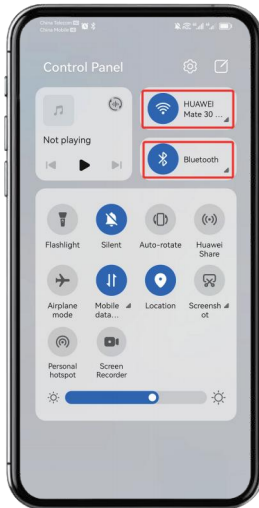


2. Connect Hotspot, turn on
Bluetooth (Phone-B)

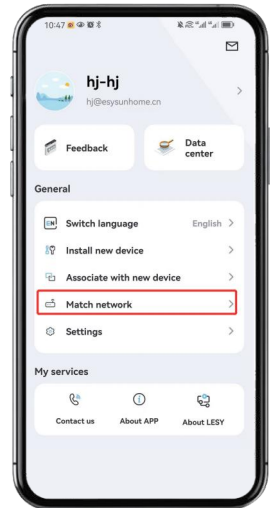


3. Match network
(Phone-B)

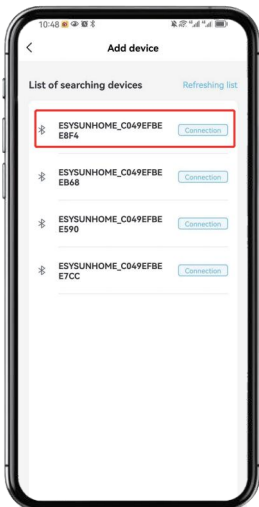

4. Connect device
(Phone-B)

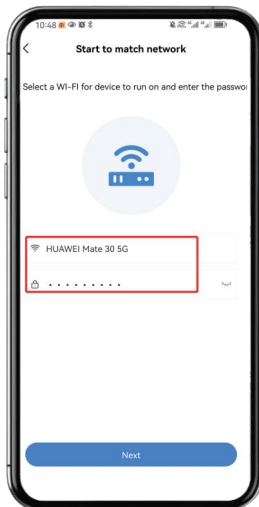


5. Fill password in
(Phone-B)

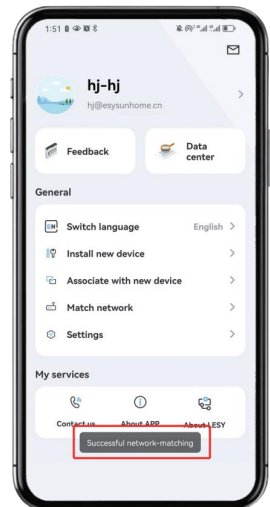


6. Success
(Phone-B)

Step 3


APP Settings

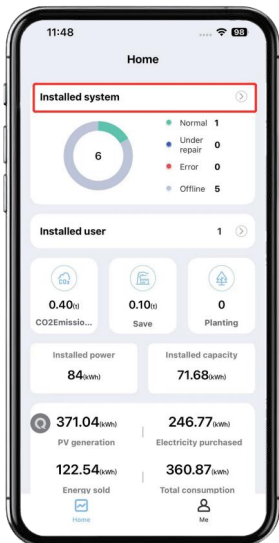


1. Home

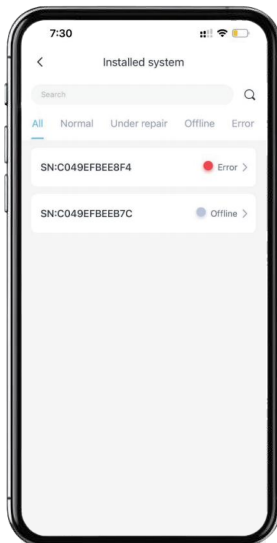


2. Select Device

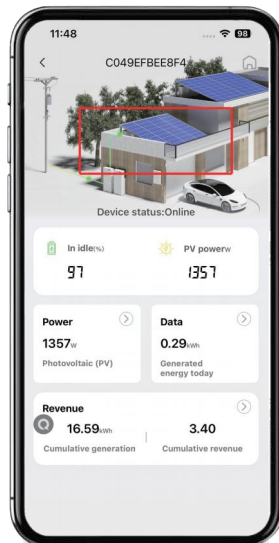

3. Tap Picture

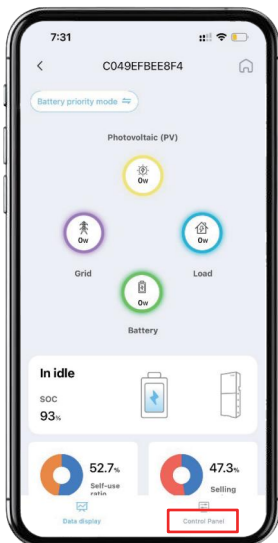

4. Control Panel

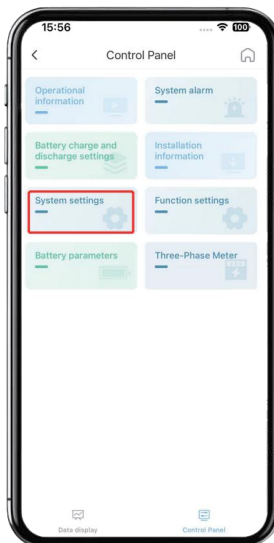


5. Select System settings

Step 3

APP Settings–System settings




6. Select Australia

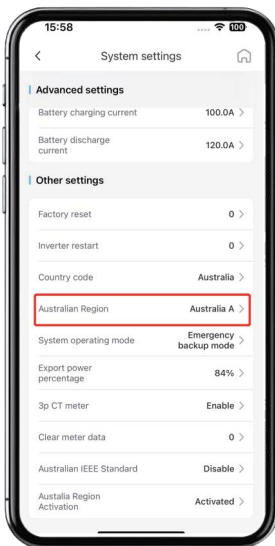

7. Select Region




8. Activate Australia

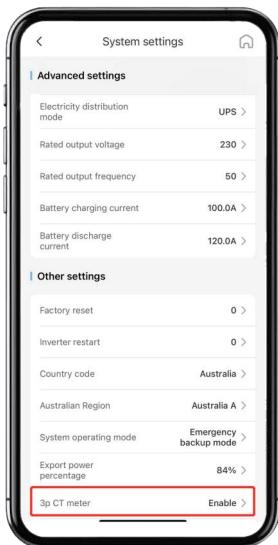

9. Select Enable
(for 3p CT meter only)

For non-CT meter, select Disable.

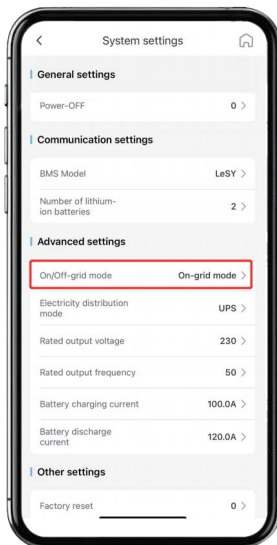


10. Set Grid mode


Step 3

APP Settings-System settings


*11 and *12 are for the regions with export limit requirements. ($5kW=84\%*6kW$ $1.5kW=25\%*6kW$)

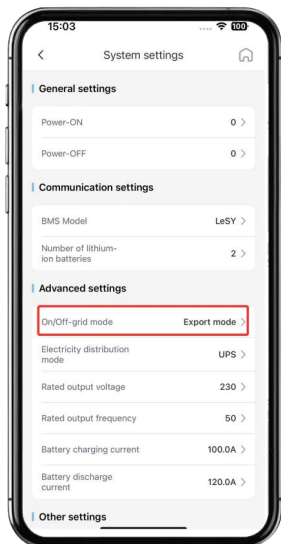


*11. Export mode

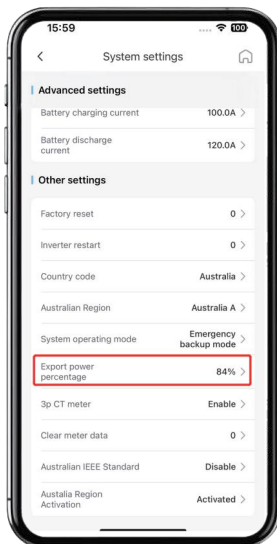


*12. Set Export power percentage

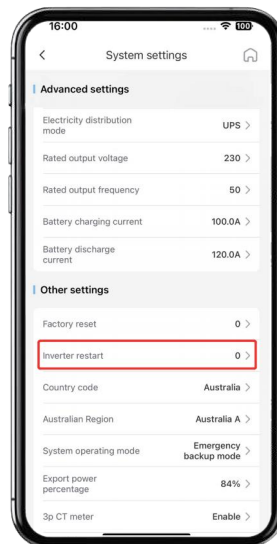

13. Inverter restart, select

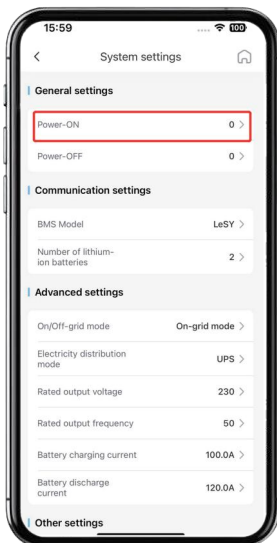

14. Power-ON, confirm

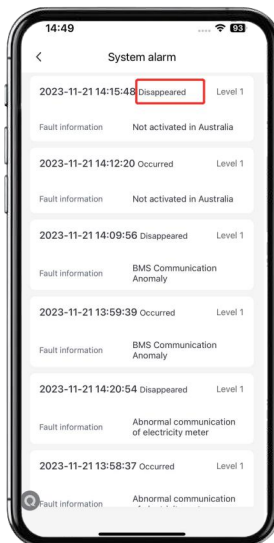

15. No alarms
If there're alarms,
contact local support

ESY SUNHOME AUSTRALIA PTY LTD

Address: 3/52-60 Roberts Road Greenacre NSW 2190

Email: info-au@esysunhome.com.au

Website: www.esysunhome.com

Tel: +61 2 9166 7642